

R41EUZ

Intel®Celeron J4125 Processor
1U Rack Mount Firewall Appliance



Features

- Onboard Intel®Celeron J4125 2.0GHz quad Core 4 thread processor
- 1* SODIMM DDR4 slot, 2400MHz, up to 8GB
- 1xVGA display output
- 4* Intel I211 Gigabit Ethernet, support WOL/PXE
- 1* CISCO RS232 COM port
- 2*USB2.0 port
- 1U rack mount case

Specification


Model No.	R41EUZ	
Case	Material/Structure	1U standard case, high quality galvanized steel case
	Color	Black gray
	Dimension	L430mm*W250.2mm*H46mm
	Installation	1U standard rack mount case
Motherboard	CPU	Onboard Intel®Celeron J4125 2.0GHz quad Core 4 thread processor ,TDP 10W
	Chipset	SOC
	Display	Integrated Intel® UHD Graphics 600
	Memory	1* SODIMM DDR4 RAM slot, 2400MHz, up to 8GB
Front Panel IO	POWER	1*Power switch
	LAN	4* Intel I211 Gigabit LAN port, support Wake On LAN / PXE function
	COM	1* CISCO RS232 COM port
	USB	2* USB2.0
	LED	1* Power LED, 1*HDD LED
Rear I/O Port	Display Port	1*VGA port
	Power Supply	1* AC power supply port
Storage	SATA	1*2.5" SATA expansion
	SSD	1* MSATA SSD expansion, transfer rate up to 3Gbps
Expansion	Mini PCIE	1* Mini-PCIE slot, support WiFi、4G module, defaulted USB signal
		Note: Mini-PCIE slot / LAN4 share same PCIE slot, optional
OS Support	Microsoft Windows	Windows 7/10, 64bit(not include OS code)
	Linux	Ubuntu
	Watch Dog	Support hardware reset function(L256, 0~255 seconds)
Power Supply	Power Type	External open power supply
	Voltage	AC 110~220V
	Consumption	AC TO DC, 60W
Environment	Working Temp.	-10°C ~ 60°C
	Storage Temp.	-20°C ~ 70°C
	Relative Humidity	5%-95% relative humidity, non-condensing
	Vibration	0.5g rms/5-500HZ/random/operating




Firewall Appliance Barebone

All product specifications are subject to change without prior-notice


Dimension Drawing

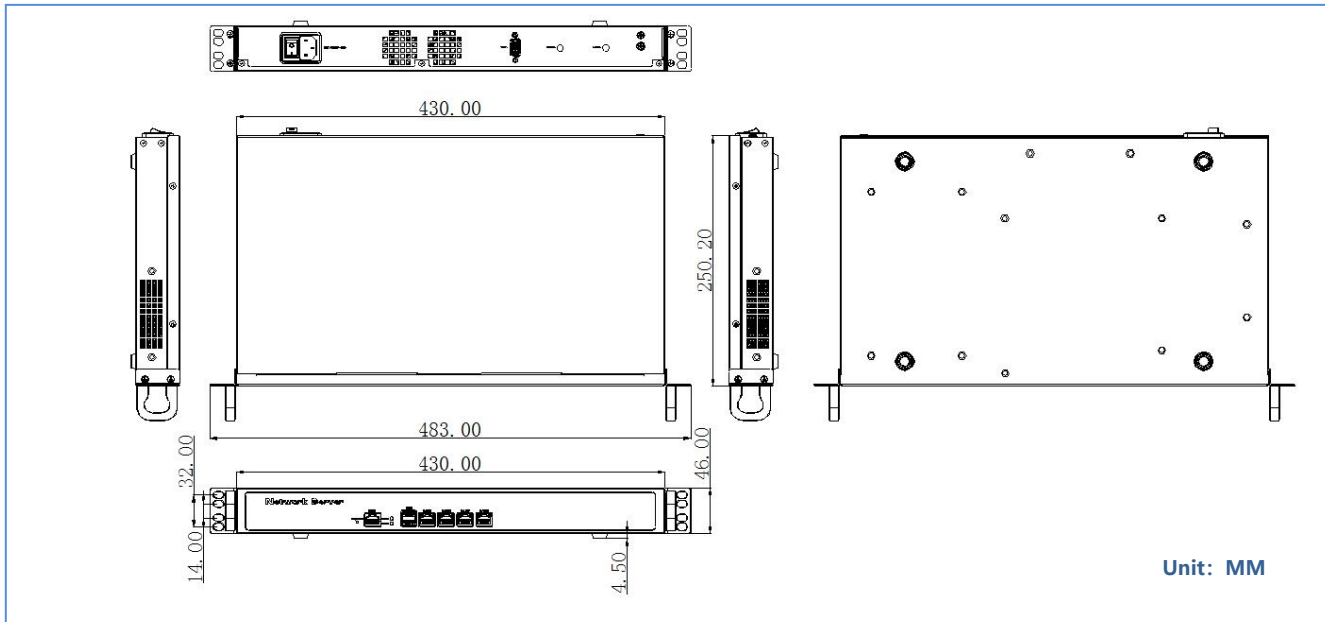

Front I/O View

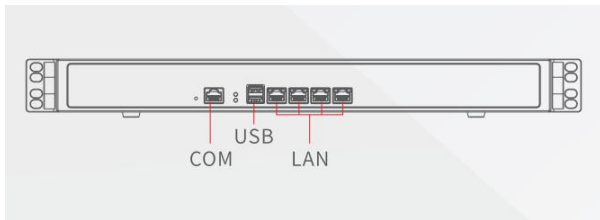

Rear I/O View

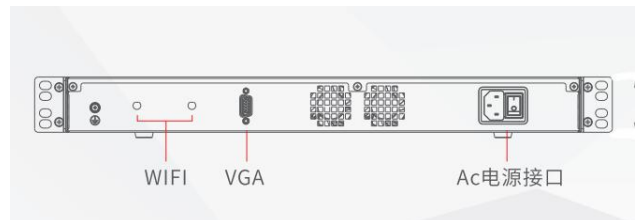

Order Information

No.	Model	Processor	Motherboard	Memory	LAN	COM	HDMI	VGA	USB2.0	USB3.0	SIM	power-input
1	R2FUZ	D2700/2.13GHz	M2F	1*SODDR3	4* 82583V	1	N/A	1	2	N/A	N/A	1U ATX PSU
2	R9FUZ V1.0(J1900)	J1900/2.0GHz	M9F	1*SODDR3L	4* 82583V	1	N/A	1	2	N/A	N/A	1U ATX PSU
3	R9EUZ V1.0(J1900)	J1900/2.0GHz	M9E	1*SODDR3L	4*I211	1	N/A	1	2	N/A	N/A	1U ATX PSU
4	R41EUZ V1.0(J4125)	J4125 /2.0GHz	M41E	1*DDR4	4*I211	1	N/A	1	2	N/A	N/A	1U ATX PSU
5	R41VUZ V1.0(J4125)	J4125 /2.0GHz	M41V	1*DDR4	4*I225V	1	N/A	1	2	N/A	N/A	1U ATX PSU